

EPISTAR TRIDONIC



**SREET LIGHT STL120 115W**  
**Code: 67115ALU50**



- DRIVER**
- Suitable for CE and ROHS Criterias
  - High Efficiency >%90
  - Harmonic Filter
  - Lasts for 50.000 Hr




- CABLE**
- 0,80mm Thickness
  - Electrolytic Solid Copper
  - TI/PVC Isolation





**Electrical Specification**

Size	Light source	Driver	Voltage	Power	CCT	IP level	lumens	CRI
930x340x80mm	SMD 5730 EPISTAR	TRIDONIC	220V-240V	115W	4500K 5500k	IP67	11740lm	CRI>80


Diffuser	Angel	Tc=C°	Certificates	Application	PF	Directive	Lifespam	Warranty
OPTICS	120°	-20/+45	ROHS/CE	OUTDOOR	PF>0.95	LVD	50 000h	3 years

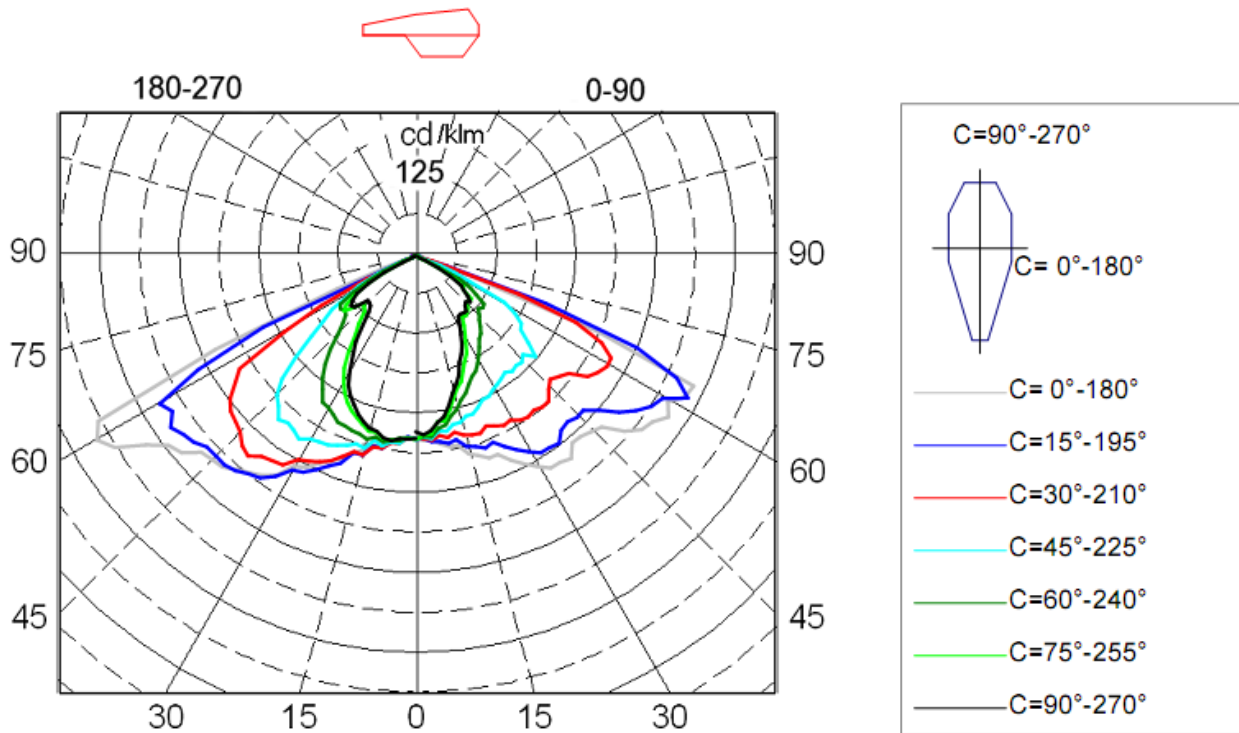


**Luminaire light distribution of polar coordinates in the conditional flux 1000lm**

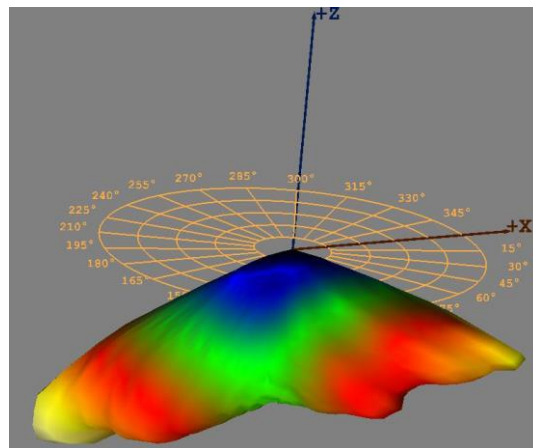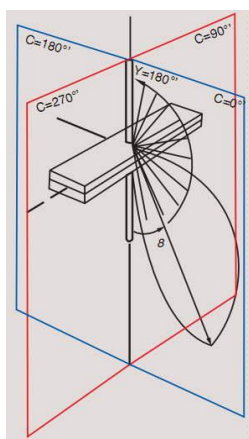

**Luminaire light distribution of the 3D**

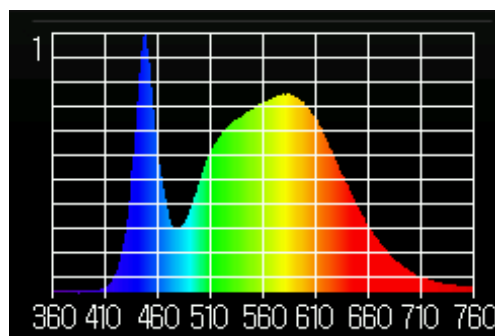

**Spectrum of light**

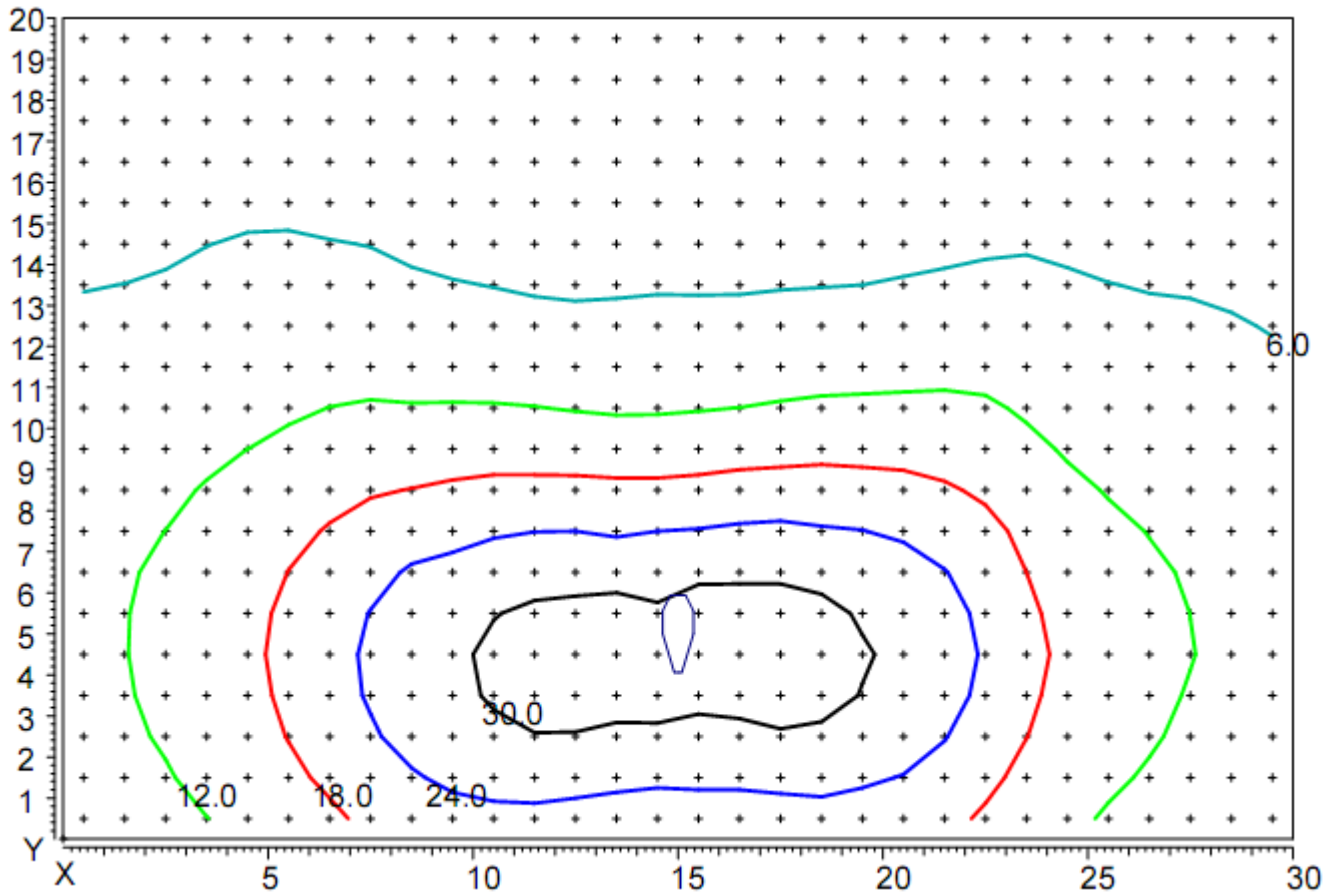

**Distribution of illumination in height hanging lamp 5 m**

**Coordinates of the luminaire X=15m, Y=5m.**